



DEF_O8A / 144 cells
 570 W - 595 W
 Mono-Crystalline Bifacial PV Module

United Renewable Energy Co., Ltd. (a company from Taiwan where the sun shines) Glory TOPCon module uses URECO TOPCon monocrystalline bifacial solar cells, and URECO advanced double glass(G2G) module manufacturing technology.



Key Features

- | | | | |
|--|---|--|--|
| | <p>Multi-Bus bar/ TLS technology
 Increase the stability of outdoor power generation</p> | | <p>Better bifaciality
 High bifacial rate</p> |
| | <p>PID resistance
 Excellent PID resistance performance</p> | | <p>Excellent low light performance
 First year power degradation 1%
 Annual degradation 0.4% each year</p> |
| | <p>Superior temperature coefficient
 Better performance in high temperature</p> | | <p>Withstand heavy loading
 Equivalent to the Beaufort wind scale 17 validation</p> |
| | <p>NO Water pollution concern
 PASS the water quality standard by E.P.A</p> | | <p>High Durability
 High resistance to salt mist & PID design
 Pass the highest level
 (IEC 61701/ IEC 60068-2-52 Severity 8)</p> |



Electrical Data

Model		Bifacial Gain			Bifacial Gain			Bifacial Gain		
		DEF57008A	5%	10%	DEF57508A	5%	10%	DEF58008A	5%	10%
Maximum Rating Power (Pmax)	[W]	570	599	627	575	604	633	580	609	638
Module Efficiency	[%]	22.07	23.17	24.28	22.26	23.37	24.49	22.45	23.57	24.70
Open Circuit Voltage (Voc)	[V]	51.06	51.06	51.06	51.24	51.24	51.24	51.42	51.42	51.42
Maximum Power Voltage	[V]	42.17	42.17	42.17	42.35	42.35	42.35	42.53	42.53	42.53
Short Circuit Current (Isc)	[A]	14.26	14.97	15.69	14.32	15.04	15.75	14.38	15.10	15.82
Maximum Power Current	[A]	13.51	14.19	14.86	13.57	14.25	14.93	13.63	14.31	14.99
Model		DEF58508A	5%	10%	DEF59008A	5%	10%	DEF59508A	5%	10%
Maximum Rating Power (Pmax)	[W]	585	614	644	590	620	649	595	625	655
Module Efficiency	[%]	22.65	23.78	24.92	22.84	23.98	25.12	23.03	24.18	25.33
Open Circuit Voltage (Voc)	[V]	51.60	51.60	51.60	51.78	51.78	51.78	51.96	51.96	51.96
Maximum Power Voltage	[V]	42.71	42.71	42.71	42.88	42.88	42.88	43.06	43.06	43.06
Short Circuit Current (Isc)	[A]	14.44	15.16	15.88	14.50	15.23	15.95	14.56	15.29	16.02
Maximum Power Current	[A]	13.69	14.37	15.06	13.75	14.44	15.13	13.81	14.50	15.19

*Standard Test Condition (STC): Cell Temperature 25 °C, Irradiance 1000 W/m², AM 1.5
 *Values without tolerance are typical numbers. Measurement tolerance: ±3%

Mechanical Data

Item	Specification
Dimensions	2278 mm (L) ¹ x 1134 mm (W) ¹ x 35 mm (D) ² / 89.69" (L) ¹ x 44.65" (W) ¹ x 1.38" (D) ²
Weight	31.20 kg / 68.78 lbs
Solar Cell	144 half-cut monocrystalline M10 N-type TOPCon cells
Front Glass	2.0mm AR-Coating, strengthened glass
Rear Glass	2.0mm strengthened glass
Frame	Anodized aluminum alloy
Junction Box	IP68, 3diodes
Cables	4.0mm ² (IEC), 12AWG (UL)
Connectors	EVO2A (1500V)
Package Configuration	30 pcs Per Pallet, 600 pcs per 40' HQ container

1 : With assembly tolerance of ± 2 mm [± 0.08"]
 2 : With assembly tolerance of ± 0.8 mm [± 0.03"]

Operating Conditions


Item	Specification
Mechanical Load	7200 Pa
Maximum System Voltage	1500 VDC
Series Fuse Rating	25 A
Operating Temperature	-40 to 85 °C

Temperature Characteristics


Item	Specification
Nominal Module Operating Temperature	43°C ± 2°C
Temperature Coefficient of Isc	0.05 % / °C
Temperature Coefficient of Voc	-0.25 % / °C
Temperature Coefficient of Pmax	-0.30 % / °C

*Nominal module operating temperature (NMOT): Air mass AM 1.5, irradiance 800W/m², temperature 20°C, windspeed 1 m/s.


Engineering Drawing (mm)

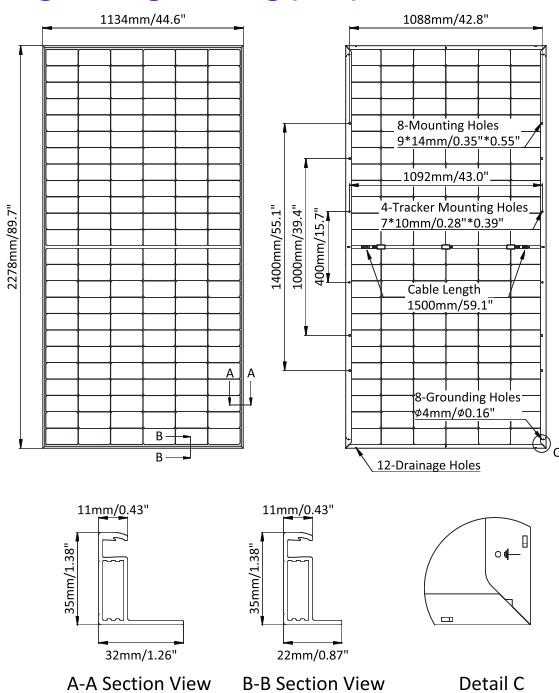

Dependence on Irradiance

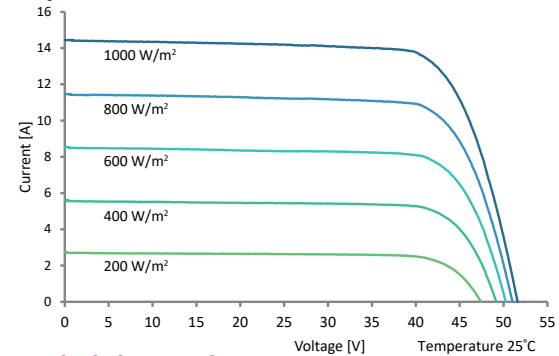

Reliability with Warranty

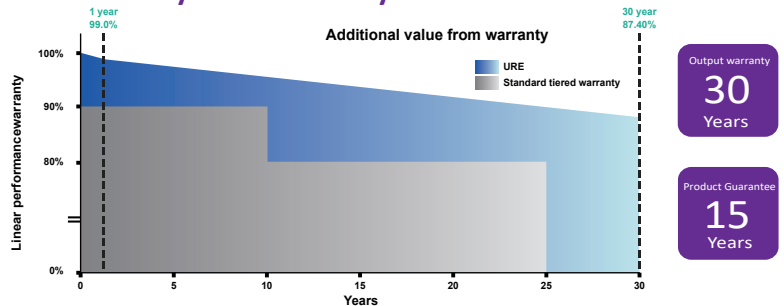

For more information, please visit us at www.urecorp.com