




## PEACH

D7M\_H8A / 144 cells (IEC 1000 V)

D7K\_H8A / 144 cells (UL 1500V)

365W - 390 W

Mono-Crystalline PV Module

URE Peach module uses URE state-of-the-art cell cutting technology, and advanced module manufacturing experiences.



## Key Features




Positive power tolerance  
+0 ~ +4.99 watt



100% EL inline inspection  
Better module reliability



Withstand heavy loading  
front load 5400 Pa & rear load 2400 Pa



Design for 1500 VDC  
Reduce the system BOS effectively



Excellent low light performance  
3.5% relative eff. Reduction at low-irradiance (200W/m<sup>2</sup>)



## Electrical Data

Model - STC		D7M365H8A D7K365H8A	D7M370H8A D7K370H8A	D7M375H8A D7K375H8A	D7M380H8A D7K380H8A	D7M385H8A D7K385H8A	D7M390H8A D7K390H8A
Maximum Rating Power (Pmax)	[W]	365	370	375	380	385	390
Module Efficiency	[%]	18.4	18.7	19.0	19.3	19.6	19.9
Open Circuit Voltage (Voc)	[V]	47.59	47.77	47.96	48.15	48.34	48.53
Maximum Power Voltage	[V]	38.58	39.02	39.37	39.71	40.05	40.39
Short Circuit Current (Isc)	[A]	10.02	10.05	10.08	10.10	10.13	10.16
Maximum Power Current	[A]	9.44	9.48	9.53	9.57	9.61	9.66

\*Standard Test Condition (STC): Cell Temperature 25 °C, Irradiance 1000 W/m<sup>2</sup>, AM 1.5

\*Values without tolerance are typical numbers.

## Mechanical Data

Item	Specification
Dimensions	2000 mm (L) <sup>1</sup> x 992 mm (W) <sup>1</sup> x 35 mm (D) <sup>2</sup> / 78.74" (L) <sup>1</sup> x 39.1" (W) <sup>1</sup> x 1.38" (D) <sup>2</sup>
Weight	23 kg / 50.7 lbs
Solar Cell	144 half-cut monocrystalline 6" silicon cells
Front Glass	Anti-reflective tempered solar glass, 3.2mm thickness
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Cover	Composite film, white
Junction Box	IP 68 rated
Frame	Anodized aluminum frame, original or black
Packaging Configuration	30 pcs Per Pallet, 704 pcs per 40' HQ container

<sup>1</sup> : With assembly tolerance of ± 2 mm [ ± 0.08"]

<sup>2</sup> : With assembly tolerance of ± 0.8 mm [ ± 0.03"]

## Operating Conditions

Item	Specification
Mechanical Load (Test Load)	5400 Pa acc. to IEC 61215
Maximum System Voltage	IEC 1000 VDC / UL 1500 VDC
Series Fuse Rating	18 A
Operating Temperature	-40 to 85 °C


## Temperature Characteristics

Item	Specification
Nominal Module Operating Temperature	42°C ± 2°C
Temperature Coefficient of Isc	0.107 % / °C
Temperature Coefficient of Voc	-0.320 % / °C
Temperature Coefficient of Pmax	-0.367 % / °C


\*Nominal module operating temperature (NMOT): Air mass AM 1.5, irradiance 800W/m<sup>2</sup>, temperature 20°C, windspeed 1 m/s.

\*Reduction in efficiency from 1000W/m<sup>2</sup> to 200W/m<sup>2</sup> at 25°C: 3 ± 2%.


## Engineering Drawing (mm)

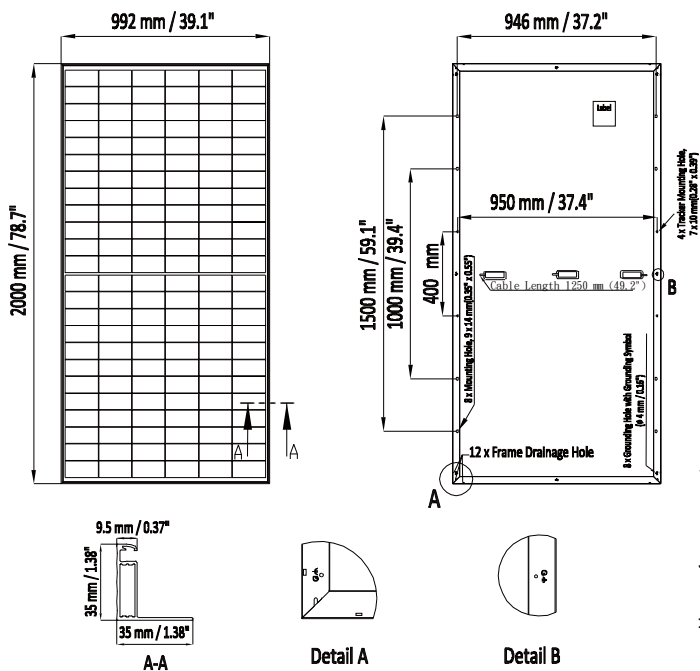

## Dependence on Irradiance

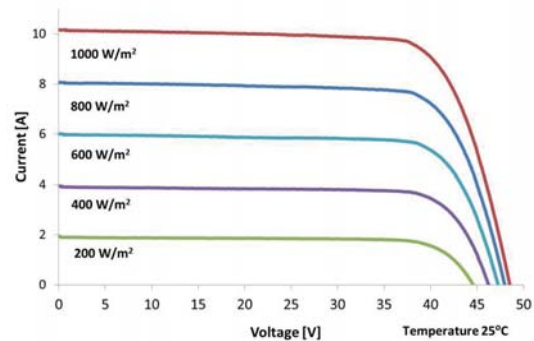

## Reliability with Warranty

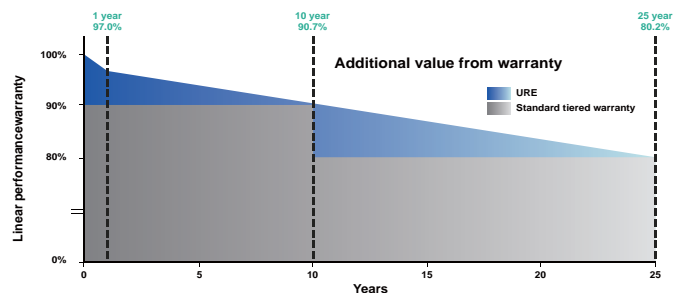

Output warranty  
**25**  
Years

Product Guarantee  
**10**  
Years

For more information, please visit us at [www.urecorp.com](http://www.urecorp.com)